




DLYY

SEALING SOLUTION

- V RING


DALIAN YINGYU CO., LIMITED

VA TYPE

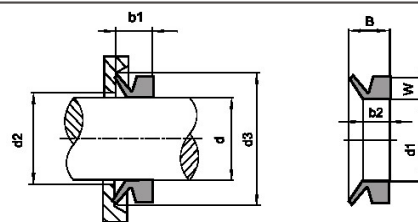


code	product dimension				installation dimension			
	d1	w	B	b2	d	d2	d3	b1
VA-003	2,5	1,5	3,0	2,1	2,7-3,4	d+1	d+4	2,5±0,3
VA-004	3,2	2,0	3,7	2,4	3,5-4,4	d+1	d+6	3,0±0,4
VA-005	4,0	2,0	3,7	2,4	4,5-5,4	d+1	d+6	3,0±0,4
VA-006	5,0	2,0	3,7	2,4	5,5-6,4	d+1	d+6	3,0±0,4
VA-007	6,0	2,0	3,7	2,4	6,5-7,5	d+1	d+6	3,0±0,4
VA-008	7,0	2,0	3,7	2,4	8,0-9,0	d+1	d+6	3,0±0,4
VA-010	9,0	3,0	5,5	3,4	9,5-11,0	d+2	d+9	4,5±0,6
VA-012	10,5	3,0	5,5	3,4	11,5-12,0	d+2	d+9	4,5±0,6
VA-014	12,5	3,0	5,5	3,4	13,5-15,0	d+2	d+9	4,5±0,6
VA-016	14,0	3,0	5,5	3,4	15,5-17,0	d+2	d+9	4,5±0,6
VA-018	16,0	3,0	5,5	3,4	17,5-18,5	d+2	d+9	4,5±0,6
VA-020	18,0	4,0	7,5	4,7	19,0-20,5	d+2	d+12	6,0±0,8
VA-022	20,0	4,0	7,5	4,7	21,0-23,5	d+2	d+12	6,0±0,8
VA-025	22,0	4,0	7,5	4,7	24,0-26,5	d+2	d+12	6,0±0,8
VA-028	25,0	4,0	7,5	4,7	27,0-28,5	d+2	d+12	6,0±0,8
VA-030	27,0	4,0	7,5	4,7	29,0-30,5	d+3	d+12	6,0±0,8
VA-032	29,0	4,0	7,5	4,7	31,0-32,5	d+3	d+12	6,0±0,8
VA-035	31,0	4,0	7,5	4,7	33,0-35,5	d+3	d+12	6,0±0,8
VA-038	34,0	4,0	7,5	4,7	36,0-37,5	d+3	d+12	6,0±0,8
VA-040	36,0	5,0	9,0	5,5	38,0-42,0	d+3	d+15	7,0±1,0
VA-045	40,0	5,0	9,0	5,5	43,0-47,0	d+3	d+15	7,0±1,0
VA-050	45,0	5,0	9,0	5,5	48,0-52,0	d+3	d+15	7,0±1,0
VA-055	49,0	5,0	9,0	5,5	53,0-57,0	d+3	d+15	7,0±1,0
VA-060	54,0	5,0	9,0	5,5	58,0-62,0	d+3	d+15	7,0±1,0
VA-065	58,0	5,0	9,0	5,5	63,0-67,0	d+3	d+15	7,0±1,0
VA-070	63,0	6,0	11,0	6,8	68,0-72,0	d+4	d+18	9,0±1,2
VA-075	67,0	6,0	11,0	6,8	73,0-77,0	d+4	d+18	9,0±1,2
VA-080	72,0	6,0	11,0	6,8	78,0-82,0	d+4	d+18	9,0±1,2
VA-085	76,0	6,0	11,0	6,8	83,0-87,0	d+4	d+18	9,0±1,2
VA-090	81,0	6,0	11,0	6,8	88,0-92,0	d+4	d+18	9,0±1,2
VA-095	85,0	6,0	11,0	6,8	93,0-97,0	d+4	d+18	9,0±1,2
VA-100	90,0	6,0	11,0	6,8	98,0-104,0	d+4	d+18	9,0±1,2
VA-110	99,0	7,0	12,8	7,9	105,0-114,0	d+4	d+21	10,5±1,5

VA TYPE

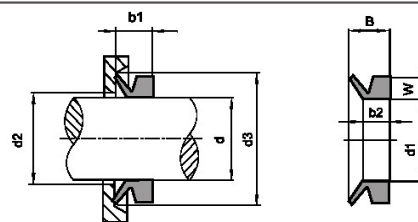


code	product dimension				installation dimension			
	d1	w	B	b2	d	d2	d3	b1
VA-120	108,0	7,0	12,8	7,9	115,0-124,0	d+4	d+21	10,5±1,5
VA-130	117,0	7,0	12,8	7,9	125,0-134,0	d+4	d+21	10,5±1,5
VA-140	126,0	7,0	12,8	7,9	135,0-144,0	d+4	d+21	10,5±1,5
VA-150	135,0	7,0	12,8	7,9	145,0-154,0	d+4	d+21	10,5±1,5
VA-160	144,0	8,0	14,5	9,0	155,0-164,0	d+5	d+24	12,0±1,8
VA-170	153,0	8,0	14,5	9,0	165,0-174,0	d+5	d+24	12,0±1,8
VA-180	162,0	8,0	14,5	9,0	175,0-184,0	d+5	d+24	12,0±1,8
VA-190	171,0	8,0	14,5	9,0	185,0-194,0	d+5	d+24	12,0±1,8
VA-199	180,0	8,0	14,5	9,0	195,0-189,0	d+5	d+24	12,0±1,8
VA-200	180,0	15,0	25,0	14,3	190,0-209,0	d+10	d+45	20,0±4,0
VA-220	198,0	15,0	25,0	14,3	210,0-234,0	d+10	d+45	20,0±4,0
VA-250	225,0	15,0	25,0	14,3	235,0-264,0	d+10	d+45	20,0±4,0
VA-275	247,0	15,0	25,0	14,3	265,0-289,0	d+10	d+45	20,0±4,0
VA-300	270,0	15,0	25,0	14,3	290,0-309,0	d+10	d+45	20,0±4,0
VA-325	292,0	15,0	25,0	14,3	310,0-334,0	d+10	d+45	20,0±4,0
VA-350	315,0	15,0	25,0	14,3	335,0-364,0	d+10	d+45	20,0±4,0
VA-375	337,0	15,0	25,0	14,3	365,0-389,0	d+10	d+45	20,0±4,0
VA-400	360,0	15,0	25,0	14,3	390,0-429,0	d+10	d+45	20,0±4,0
VA-450	405,0	15,0	25,0	14,3	430,0-479,0	d+10	d+45	20,0±4,0
VA-500	450,0	15,0	25,0	14,3	480,0-529,0	d+10	d+45	20,0±4,0
VA-550	495,0	15,0	25,0	14,3	530,0-579,0	d+10	d+45	20,0±4,0
VA-600	540,0	15,0	25,0	14,3	580,0-629,0	d+10	d+45	20,0±4,0
VA-650	600,0	15,0	25,0	14,3	630,0-664,0	d+10	d+45	20,0±4,0
VA-700	630,0	15,0	25,0	14,3	665,0-704,0	d+10	d+45	20,0±4,0
VA-725	670,0	15,0	25,0	14,3	705,0-744,0	d+10	d+45	20,0±4,0
VA-750	705,0	15,0	25,0	14,3	745,0-784,0	d+10	d+45	20,0±4,0
VA-800	745,0	15,0	25,0	14,3	785,0-829,0	d+10	d+45	20,0±4,0
VA-850	785,0	15,0	25,0	14,3	830,0-874,0	d+10	d+45	20,0±4,0
VA-900	825,0	15,0	25,0	14,3	875,0-919,0	d+10	d+45	20,0±4,0
VA-950	865,0	15,0	25,0	14,3	920,0-964,0	d+10	d+45	20,0±4,0
VA-1000	910,0	15,0	25,0	14,3	965,0-1010,0	d+10	d+45	20,0±4,0
VA-1050	955,0	15,0	25,0	14,3	1015,0-1060,0	d+10	d+45	20,0±4,0
VA-1100	1000,0	15,0	25,0	14,3	1065,0-1110,0	d+10	d+45	20,0±4,0

VA TYPE

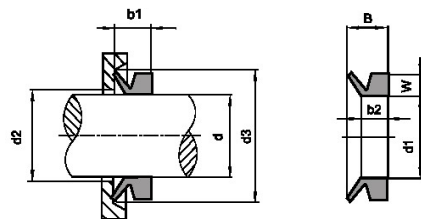

code	product dimension				installation dimension			
	d1	w	B	b2	d	d2	d3	b1
VA-1150	1045,0	15,0	25,0	14,3	1115,0-1160,0	d+10	d+45	20,0±4,0
VA-1200	1090,0	15,0	25,0	14,3	1165,0-1210,0	d+10	d+45	20,0±4,0
VA-1250	1135,0	15,0	25,0	14,3	1215,0-1260,0	d+10	d+45	20,0±4,0
VA-1300	1180,0	15,0	25,0	14,3	1270,0-1310,0	d+10	d+45	20,0±4,0
VA-1350	1225,0	15,0	25,0	14,3	1320,0-1360,0	d+10	d+45	20,0±4,0
VA-1400	1270,0	15,0	25,0	14,3	1370,0-1410,0	d+10	d+45	20,0±4,0
VA-1450	1315,0	15,0	25,0	14,3	1420,0-1460,0	d+10	d+45	20,0±4,0
VA-1500	1360,0	15,0	25,0	14,3	1470,0-1510,0	d+10	d+45	20,0±4,0
VA-1550	1405,0	15,0	25,0	14,3	1520,0-1560,0	d+10	d+45	20,0±4,0
VA-1600	1450,0	15,0	25,0	14,3	1570,0-1610,0	d+10	d+45	20,0±4,0
VA-1650	1495,0	15,0	25,0	14,3	1620,0-1660,0	d+10	d+45	20,0±4,0
VA-1700	1540,0	15,0	25,0	14,3	1670,0-1710,0	d+10	d+45	20,0±4,0
VA-1750	1585,0	15,0	25,0	14,3	1720,0-1760,0	d+10	d+45	20,0±4,0
VA-1800	1630,0	15,0	25,0	14,3	1770,0-1810,0	d+10	d+45	20,0±4,0
VA-1850	1675,0	15,0	25,0	14,3	1820,0-1860,0	d+10	d+45	20,0±4,0
VA-1900	1720,0	15,0	25,0	14,3	1870,0-1910,0	d+10	d+45	20,0±4,0
VA-1950	1765,0	15,0	25,0	14,3	1920,0-1960,0	d+10	d+45	20,0±4,0
VA-2000	1810,0	15,0	25,0	14,3	1970,0-2010,0	d+10	d+45	20,0±4,0


VS TYPE

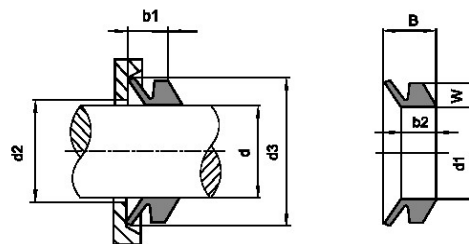

code	product dimension				installation dimension			
	d1	w	B	b2	d	d2	d3	b1
VS-005	4,0	2,0	5,2	3,9	4,5-5,4	d+1	d+6	4,5±0,4
VS-006	5,0	2,0	5,2	3,9	5,5-6,4	d+1	d+6	4,5±0,4
VS-007	6,0	2,0	5,2	3,9	6,5-7,5	d+1	d+6	4,5±0,4
VS-008	7,0	2,0	5,2	3,9	8,0-9,0	d+1	d+6	4,5±0,4
VS-010	9,0	3,0	7,7	5,6	9,5-11,0	d+2	d+9	6,7±0,6
VS-012	10,5	3,0	7,7	5,6	11,5-13,0	d+2	d+9	6,7±0,6
VS-014	12,5	3,0	7,7	5,6	13,5-15,0	d+2	d+9	6,7±0,6
VS-016	14,0	3,0	7,7	5,6	15,5-17,0	d+2	d+9	6,7±0,6
VS-018	16,0	3,0	7,7	5,6	17,5-18,5	d+2	d+9	6,7±0,6
VS-020	18,0	4,0	10,5	7,9	19,0-20,5	d+2	d+12	9,0±0,8
VS-022	20,0	4,0	10,5	7,9	21,0-23,5	d+2	d+12	9,0±0,8
VS-025	22,0	4,0	10,5	7,9	24,0-26,5	d+2	d+12	9,0±0,8
VS-028	25,0	4,0	10,5	7,9	27,0-28,5	d+3	d+12	9,0±0,8
VS-030	27,0	4,0	10,5	7,9	29,0-30,5	d+3	d+12	9,0±0,8
VS-032	29,0	4,0	10,5	7,9	31,0-32,5	d+3	d+12	9,0±0,8
VS-035	31,0	4,0	10,5	7,9	33,0-35,5	d+3	d+12	9,0±0,8
VS-038	34,0	4,0	10,5	7,9	36,0-37,5	d+3	d+12	9,0±0,8
VS-040	36,0	5,0	13,0	9,5	38,0-42,0	d+3	d+15	11,0±1,0
VS-045	40,0	5,0	13,00	9,5	43,0-47,0	d+3	d+15	11,0±1,0
VS-050	45,0	5,0	13,0	9,5	48,0-52,0	d+3	d+15	11,0±1,0
VS-055	49,0	5,0	13,0	9,5	53,0-57,0	d+3	d+15	11,0±1,0
VS-060	54,0	5,0	13,0	9,5	58,0-62,0	d+3	d+15	11,0±1,0
VS-065	58,0	5,0	13,0	9,5	63,0-67,0	d+3	d+15	11,0±1,0
VS-070	63,0	6,0	15,5	11,3	68,0-72,0	d+4	d+18	13,5±1,2
VS-075	67,0	6,0	15,5	11,3	73,0-77,0	d+4	d+18	13,5±1,2
VS-080	72,0	6,0	15,5	11,3	78,0-82,0	d+4	d+18	13,5±1,2
VS-085	76,0	6,0	15,5	11,3	83,0-87,0	d+4	d+18	13,5±1,2
VS-090	81,0	6,0	15,5	11,3	88,0-92,0	d+4	d+18	13,5±1,2
VS-095	85,0	6,0	15,5	11,3	93,0-97,0	d+4	d+18	13,5±1,2
VS-100	90,0	6,0	15,5	11,3	98,0-104,0	d+4	d+18	13,5±1,2
VS-110	99,0	7,0	18,0	13,1	105,0-114,0	d+4	d+21	15,5±1,5
VS-120	108,0	7,0	18,0	13,1	115,0-124,0	d+4	d+21	15,5±1,5
VS-130	117,0	7,0	18,0	13,1	125,0-134,0	d+4	d+21	15,5±1,5




VS TYPE

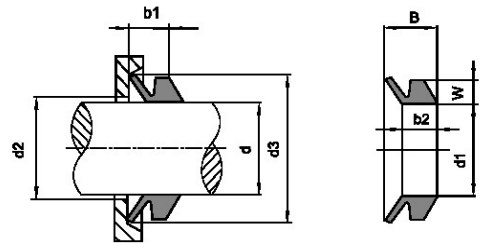


code	product dimension				installation dimension			
	d1	w	B	b2	d	d2	d3	b1
VS-140	126,0	7,0	18,0	13,1	135,0-144,0	d+4	d+21	15,5±1,5
VS-150	135,0	7,0	18,0	13,1	145,0-154,0	d+4	d+21	15,5±1,5
VS-160	144,0	8,0	20,5	15,0	155,0-164,0	d+5	d+24	18,0±1,8
VS-170	153,0	8,0	20,5	15,0	165,0-174,0	d+5	d+24	18,0±1,8
VS-180	162,0	8,0	20,5	15,0	175,0-184,0	d+5	d+24	18,0±1,8
VS-190	171,0	8,0	20,5	15,0	185,0-194,0	d+5	d+24	18,0±1,8
VS-200	180,0	8,0	20,5	15,0	195,0-210,0	d+5	d+24	18,0±1,8

VL TYPE

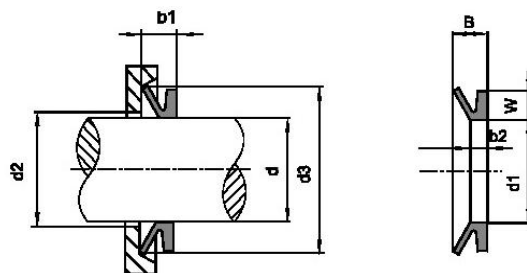


code	product dimension				installation dimension			
	d1	w	B	b2	d	d2	d3	b1
VL-120	108,0	6,5	10,5	6,0	115-120	d+5	d+20	8,0±1,5
VL-130	117,0	6,5	10,5	6,0	125-130	d+5	d+20	8,0±1,5
VL-140	126,0	6,5	10,5	6,0	135-140	d+5	d+20	8,0±1,5
VL-150	135,0	6,5	10,5	6,0	145-150	d+5	d+20	8,0±1,5
VL-160	144,0	6,5	10,5	6,0	155-160	d+5	d+20	8,0±1,5
VL-170	153,0	6,5	10,5	6,0	165-170	d+5	d+20	8,0±1,5
VL-180	162,0	6,5	10,5	6,0	175-180	d+5	d+20	8,0±1,5
VL-190	171,0	6,5	10,5	6,0	185-190	d+5	d+20	8,0±1,5
VL-200	182,0	6,5	10,5	6,0	195-205	d+5	d+20	8,0±1,5
VL-220	198,0	6,5	10,5	6,0	210-230	d+5	d+20	8,0±1,5
VL-250	225,0	6,5	10,5	6,0	233-255	d+5	d+20	8,0±1,5
VL-275	247,0	6,5	10,5	6,0	260-280	d+5	d+20	8,0±1,5
VL-300	270,0	6,5	10,5	6,0	285-305	d+5	d+20	8,0±1,5
VL-325	292,0	6,5	10,5	6,0	310-330	d+5	d+20	8,0±1,5
VL-350	315,0	6,5	10,5	6,0	335-360	d+5	d+20	8,0±1,5
VL-375	337,0	6,5	10,5	6,0	365-380	d+5	d+20	8,0±1,5
VL-400	360,0	6,5	10,5	6,0	385-405	d+5	d+20	8,0±1,5
VL-425	382,0	6,5	10,5	6,0	410-435	d+5	d+20	8,0±1,5
VL-450	405,0	6,5	10,5	6,0	440-475	d+5	d+20	8,0±1,5
VL-500	450,0	6,5	10,5	6,0	480-525	d+5	d+20	8,0±1,5
VL-550	485,0	6,5	10,5	6,0	530-575	d+5	d+20	8,0±1,5
VL-600	540,0	6,5	10,5	6,0	580-630	d+5	d+20	8,0±1,5

VE,VB TYPE

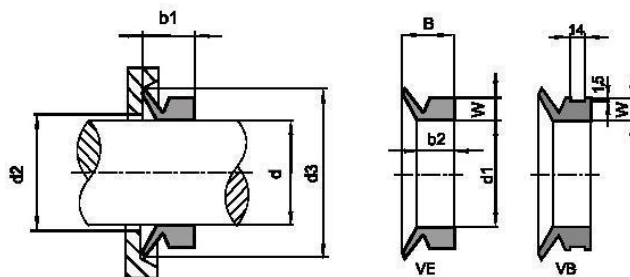


code	product dimension				installation dimension			
	d1	w	B	b2	d	d2	d3	b1
VB-300	294,0	21,0	65,0	32,5	300,0	d+24	d+115	50,0±12
VB-305	299,0	21,0	65,0	32,5	305,0	d+24	d+115	50,0±12
VE-310	304,0	30,0	65,0	32,5	310,0	d+24	d+115	50,0±12
VB-315	309,0	21,0	65,0	32,5	315,0	d+24	d+115	50,0±12
VE-320	314,0	30,0	65,0	32,5	320,0	d+24	d+115	50,0±12
VB-325	319,0	21,0	65,0	32,5	325,0	d+24	d+115	50,0±12
VB-330	323,0	21,0	65,0	32,5	330,0	d+24	d+115	50,0±12
VB-335	328,0	21,0	65,0	32,5	335,0	d+24	d+115	50,0±12
VB-340	333,0	21,0	65,0	32,5	340,0	d+24	d+115	50,0±12
VB-345	338,0	21,0	65,0	32,5	345,0	d+24	d+115	50,0±12
VB-350	343,0	21,0	65,0	32,5	350,0	d+24	d+115	50,0±12
VB-355	347,0	21,0	65,0	32,5	355,0	d+24	d+115	50,0±12
VB-360	352,0	21,0	65,0	32,5	360,0	d+24	d+115	50,0±12
VB-365	357,0	21,0	65,0	32,5	365,0	d+24	d+115	50,0±12
VB-375	367,0	21,0	65,0	32,5	375,0	d+24	d+115	50,0±12
VE-380	371,0	30,0	65,0	32,5	380,0	d+24	d+115	50,0±12
VB-385	376,0	21,0	65,0	32,5	385,0	d+24	d+115	50,0±12
VE-390	381,0	30,0	65,0	32,5	390,0	d+24	d+115	50,0±12
VB-395	386,0	21,0	65,0	32,5	395,0	d+24	d+115	50,0±12
VB-400	391,0	21,0	65,0	32,5	400,0	d+24	d+115	50,0±12
VB-405	396,0	21,0	65,0	32,5	405,0	d+24	d+115	50,0±12
VB-410	401,0	21,0	65,0	32,5	410,0	d+24	d+115	50,0±12
VB-415	405,0	21,0	65,0	32,5	415,0	d+24	d+115	50,0±12
VB-420	410,0	21,0	65,0	32,5	420,0	d+24	d+115	50,0±12
VB-425	415,0	21,0	65,0	32,5	425,0	d+24	d+115	50,0±12
VB-430	420,0	21,0	65,0	32,5	430,0	d+24	d+115	50,0±12
VB-435	425,0	21,0	65,0	32,5	435,0	d+24	d+115	50,0±12
VB-440	429,0	21,0	65,0	32,5	440,0	d+24	d+115	50,0±12
VB-445	434,0	21,0	65,0	32,5	445,0	d+24	d+115	50,0±12
VB-450	439,0	21,0	65,0	32,5	450,0	d+24	d+115	50,0±12
VB-455	444,0	21,0	65,0	32,5	455,0	d+24	d+115	50,0±12
VE-460	448,0	30,0	65,0	32,5	460,0	d+24	d+115	50,0±12
VB-465	453,0	21,0	65,0	32,5	465,0	d+24	d+115	50,0±12

VE,VB TYPE

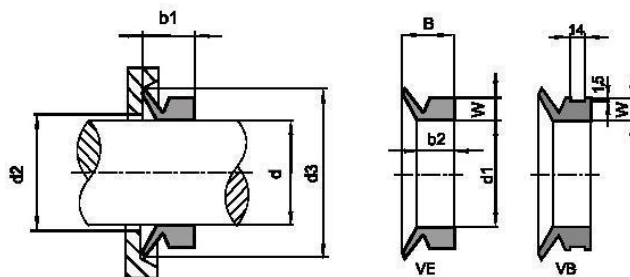


code	product dimension				installation dimension			
	d1	w	B	b2	d	d2	d3	b1
VB-470	458,0	21,0	65,0	32,5	470,0	d+24	d+115	50,0±12
VB-475	463,0	21,0	65,0	32,5	475,0	d+24	d+115	50,0±12
VB-480	468,0	21,0	65,0	32,5	480,0	d+24	d+115	50,0±12
VE-485	473,0	30,0	65,0	32,5	485,0	d+24	d+115	50,0±12
VB-490	478,0	21,0	65,0	32,5	490,0	d+24	d+115	50,0±12
VB-495	483,0	21,0	65,0	32,5	495,0	d+24	d+115	50,0±12
VB-500	488,0	21,0	65,0	32,5	500,0	d+24	d+115	50,0±12
VB-505	493,0	21,0	65,0	32,5	505,0	d+24	d+115	50,0±12
VB-510	497,0	21,0	65,0	32,5	510,0	d+24	d+115	50,0±12
VE-515	502,0	30,0	65,0	32,5	515,0	d+24	d+115	50,0±12
VB-520	507,0	21,0	65,0	32,5	520,0	d+24	d+115	50,0±12
VB-525	512,0	21,0	65,0	32,5	525,0	d+24	d+115	50,0±12
VB-530	517,0	21,0	65,0	32,5	530,0	d+24	d+115	50,0±12
VB-535	521,0	21,0	65,0	32,5	535,0	d+24	d+115	50,0±12
VB-540	526,0	21,0	65,0	32,5	540,0	d+24	d+115	50,0±12
VB-545	531,0	21,0	65,0	32,5	545,0	d+24	d+115	50,0±12
VB-550	536,0	21,0	65,0	32,5	550,0	d+24	d+115	50,0±12
VB-555	541,0	21,0	65,0	32,5	555,0	d+24	d+115	50,0±12
VB-560	546,0	21,0	65,0	32,5	560,0	d+24	d+115	50,0±12
VB-565	550,0	21,0	65,0	32,5	565,0	d+24	d+115	50,0±12
VB-570	555,0	21,0	65,0	32,5	570,0	d+24	d+115	50,0±12
VB-575	560,0	21,0	65,0	32,5	575,0	d+24	d+115	50,0±12
VE-580	565,0	30,0	65,0	32,5	580,0	d+24	d+115	50,0±12
VB-585	570,0	21,0	65,0	32,5	585,0	d+24	d+115	50,0±12
VB-590	575,0	21,0	65,0	32,5	590,0	d+24	d+115	50,0±12
VE-600	582,0	30,0	65,0	32,5	600,0	d+24	d+115	50,0±12
VB-610	592,0	21,0	65,0	32,5	610,0	d+24	d+115	50,0±12
VB-620	602,0	21,0	65,0	32,5	620,0	d+24	d+115	50,0±12
VB-630	612,0	21,0	65,0	32,5	630,0	d+24	d+115	50,0±12
VB-640	621,0	21,0	65,0	32,5	640,0	d+24	d+115	50,0±12
VB-650	631,0	21,0	65,0	32,5	650,0	d+24	d+115	50,0±12
VE-660	640,0	30,0	65,0	32,5	660,0	d+24	d+115	50,0±12
VB-670	650,0	21,0	65,0	32,5	670,0	d+24	d+115	50,0±12

VE,VB TYPE

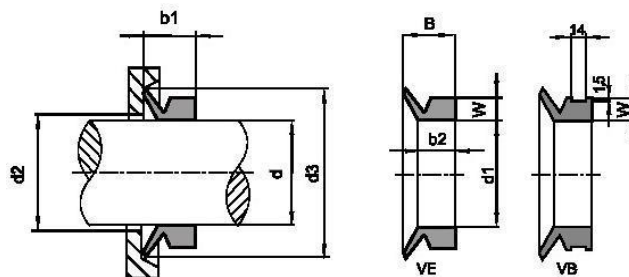

code	product dimension				installation dimension			
	d1	w	B	b2	d	d2	d3	b1
VB-680	660,0	21,0	65,0	32,5	680,0	d+24	d+115	50,0±12
VE-690	670,0	30,0	65,0	32,5	690,0	d+24	d+115	50,0±12
VB-700	680,0	21,0	65,0	32,5	700,0	d+24	d+115	50,0±12
VB-710	689,0	21,0	65,0	32,5	710,0	d+24	d+115	50,0±12
VB-720	699,0	21,0	65,0	32,5	720,0	d+24	d+115	50,0±12
VB-730	709,0	21,0	65,0	32,5	730,0	d+24	d+115	50,0±12
VE-740	718,0	30,0	65,0	32,5	740,0	d+24	d+115	50,0±12
VB-750	728,0	21,0	65,0	32,5	750,0	d+24	d+115	50,0±12
VB-760	735,0	21,0	65,0	32,5	760,0	d+24	d+115	50,0±12
VB-770	743,0	21,0	65,0	32,5	770,0	d+24	d+115	50,0±12
VB-780	751,0	21,0	65,0	32,5	780,0	d+24	d+115	50,0±12
VB-790	759,0	21,0	65,0	32,5	790,0	d+24	d+115	50,0±12
VB-800	768,0	21,0	65,0	32,5	800,0	d+24	d+115	50,0±12
VB-810	777,0	21,0	65,0	32,5	810,0	d+24	d+115	50,0±12
VE-820	786,0	30,0	65,0	32,5	820,0	d+24	d+115	50,0±12
VB-830	796,0	21,0	65,0	32,5	830,0	d+24	d+115	50,0±12
VB-840	805,0	21,0	65,0	32,5	840,0	d+24	d+115	50,0±12
VB-850	814,0	21,0	65,0	32,5	850,0	d+24	d+115	50,0±12
VB-860	824,0	21,0	65,0	32,5	860,0	d+24	d+115	50,0±12
VB-870	833,0	21,0	65,0	32,5	870,0	d+24	d+115	50,0±12
VB-880	843,0	21,0	65,0	32,5	880,0	d+24	d+115	50,0±12
VB-890	853,0	21,0	65,0	32,5	890,0	d+24	d+115	50,0±12
VE-900	871,0	30,0	65,0	32,5	900,0	d+24	d+115	50,0±12
VB-920	880,0	21,0	65,0	32,5	920,0	d+24	d+115	50,0±12
VB-930	890,0	21,0	65,0	32,5	930,0	d+24	d+115	50,0±12
VB-940	900,0	21,0	65,0	32,5	940,0	d+24	d+115	50,0±12
VB-950	911,0	21,0	65,0	32,5	950,0	d+24	d+115	50,0±12
VB-960	921,0	21,0	65,0	32,5	960,0	d+24	d+115	50,0±12
VB-970	932,0	21,0	65,0	32,5	970,0	d+24	d+115	50,0±12
VB-980	942,0	21,0	65,0	32,5	980,0	d+24	d+115	50,0±12
VB-990	953,0	21,0	65,0	32,5	990,0	d+24	d+115	50,0±12
VE-1000	963,0	30,0	65,0	32,5	1000,0	d+24	d+115	50,0±12
VE-1020	973,0	30,0	65,0	32,5	1020,0	d+24	d+115	50,0±12

VE,VB TYPE

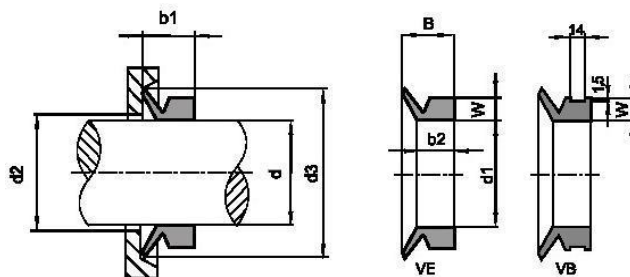

code	product dimension				installation dimension			
	d1	w	B	b2	d	d2	d3	b1
VB-1040	990,0	21,0	65,0	32,5	1040,0	d+24	d+115	50,0±12
VB-1060	1008,0	21,0	65,0	32,5	1060,0	d+24	d+115	50,0±12
VB-1080	1027,0	21,0	65,0	32,5	1080,0	d+24	d+115	50,0±12
VB-1100	1045,0	21,0	65,0	32,5	1100,0	d+24	d+115	50,0±12
VB-1120	1065,0	21,0	65,0	32,5	1120,0	d+24	d+115	50,0±12
VB-1140	1084,0	21,0	65,0	32,5	1140,0	d+24	d+115	50,0±12
VB-1160	1103,0	21,0	65,0	32,5	1160,0	d+24	d+115	50,0±12
VB-1180	1121,0	21,0	65,0	32,5	1180,0	d+24	d+115	50,0±12
VE-1200	1139,0	30,0	65,0	32,5	1200,0	d+24	d+115	50,0±12
VB-1220	1157,0	21,0	65,0	32,5	1220,0	d+24	d+115	50,0±12
VE-1240	1176,0	30,0	65,0	32,5	1240,0	d+24	d+115	50,0±12
VB-1260	1195,0	21,0	65,0	32,5	1260,0	d+24	d+115	50,0±12
VE-1280	1218,0	30,0	65,0	32,5	1280,0	d+24	d+115	50,0±12
VB-1300	1240,0	21,0	65,0	32,5	1300,0	d+24	d+115	50,0±12
VE-1325	1259,0	30,0	65,0	32,5	1325,0	d+24	d+115	50,0±12
VB-1350	1281,0	21,0	65,0	32,5	1350,0	d+24	d+115	50,0±12
VB-1375	1305,0	21,0	65,0	32,5	1375,0	d+24	d+115	50,0±12
VB-1400	1328,0	21,0	65,0	32,5	1400,0	d+24	d+115	50,0±12
VB-1425	1350,0	21,0	65,0	32,5	1425,0	d+24	d+115	50,0±12
VB-1450	1374,0	21,0	65,0	32,5	1450,0	d+24	d+115	50,0±12
VB-1475	1397,0	21,0	65,0	32,5	1475,0	d+24	d+115	50,0±12
VB-1500	1419,0	21,0	65,0	32,5	1500,0	d+24	d+115	50,0±12
VB-1525	1443,0	21,0	65,0	32,5	1525,0	d+24	d+115	50,0±12
VB-1550	1467,0	21,0	65,0	32,5	1550,0	d+24	d+115	50,0±12
VB-1575	1495,0	21,0	65,0	32,5	1575,0	d+24	d+115	50,0±12
VB-1600	1524,0	21,0	65,0	32,5	1600,0	d+24	d+115	50,0±12
VB-1650	1559,0	21,0	65,0	32,5	1650,0	d+24	d+115	50,0±12
VB-1700	1596,0	21,0	65,0	32,5	1700,0	d+24	d+115	50,0±12
VB-1750	1632,0	21,0	65,0	32,5	1750,0	d+24	d+115	50,0±12
VB-1800	1671,0	21,0	65,0	32,5	1800,0	d+24	d+115	50,0±12
VB-1850	1714,0	21,0	65,0	32,5	1850,0	d+24	d+115	50,0±12
VB-1900	1753,0	21,0	65,0	32,5	1900,0	d+24	d+115	50,0±12
VB-1950	1794,0	21,0	65,0	32,5	1950,0	d+24	d+115	50,0±12
VB-2000	1844,0	21,0	65,0	32,5	2000,0	d+24	d+115	50,0±12



DLYY

DALIAN YINGYU CO., LIMITED

Is a leading designer and manufacturer of seals and rubber products with over 20 years experience. We are serving the needs of countless industries from bearing and automobile to valve and machine. The products are exporting to many countries and well received. There are more than thousands of clients keeping in touch with us.

Our standard products cover most kinds of seals from o ring kit, o ring, X ring, rubber cord to V ring, oil seal, wiper seal, u ring, rod seal, piston seal. We can produce the custom molded rubber products as per customer's drawing or design. The material can be NBR, HNBR, SI, VITON, EPDM, CR, NR, PU, SBR, FVMQ, etc. To meet the requirement of different operation condition and environment protection standard, there is rubber with special certification approved, such as FDA, RoHS, SGS, UL, NSF, WRAS, and REACH etc., which can satisfy clients from different countries. And we are also the ISO9001 certification factory.

VALUED CUSTOMERS

